
Quick Installation Guide

AC600 Wireless Dual Band USB Adapter MODEL NO. Archer T2U



For more information, please visit our website http://www.tp-link.com 7106505772 REV3.0.0

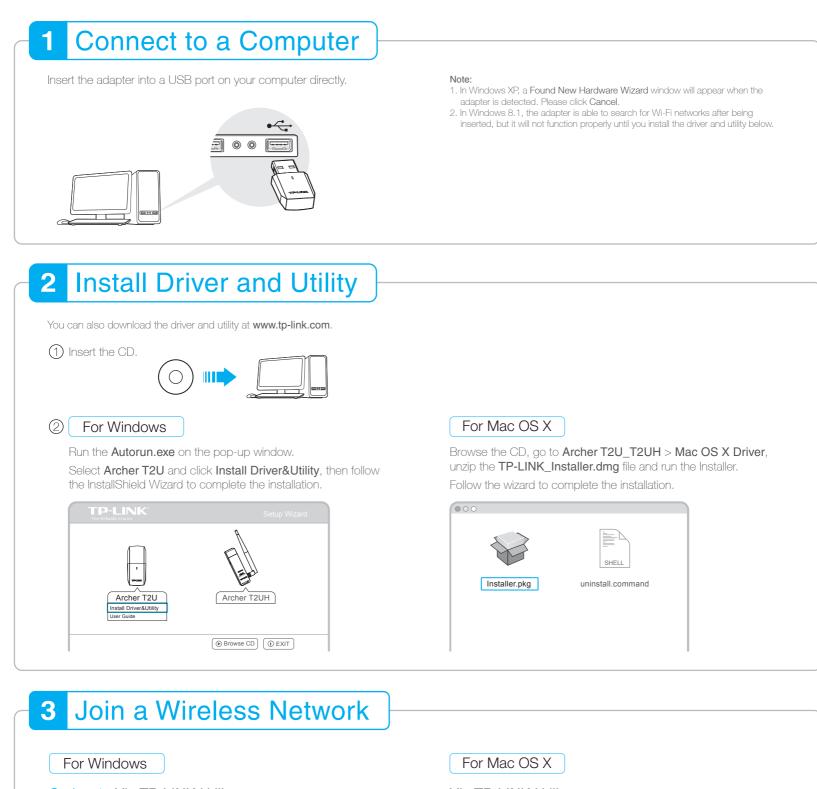

Option 1: Via TP-LINK Utility

Select your Wi-Fi network from the pop-up utility window and click Connect. The symbol 2 indicates a successful connection.

TP-LINK [®]					
Status WPS	Network Profile		Advanced	SoftAP	
Network Name(SSID) 🔻	Secu	rity 🔻	Channel 🔻	Signal 💌	
TP-LINK_A	_	PA2-Personal automatically	6 (2.4G) Connect	adi I	
34567_TEST	WPA/W	PA2-Personal	2 (2.4G)	aff	
abcdef_0903	None		149 (5G)	aff.	
AAAAAA	None		5 (2.4G)	afi	



Via TP-LINK Utility

A: Select the Site Survey tab of the pop-up utility window.

B: Select your Wi-Fi network and click **CONNECT**. The connection status can be viewed on the Link Status screen.

Δ ^p st								
SSID	BSSID	Signal	Channel	Authe	Encr	Network Type		
TP-LINK_A	72 - 10 - 18 - 01 - 00 - 03	5	6	WPA2-PS	AES	Infrastructure		
34567_TEST	02 - 10 - 18 - 01 - 00 - 02	2	2	WPA2- PS	AES	Infrastructure		
abcdef_0903	00 - 51 - E1 - 02 - 20 - 44	7	149	Open	NONE	Infrastructure		
AAAAAA	00 - 10 -18 - A9 - 5D - 8D	29	5	Open	NONE	Infrastructure		

Option 2: Via Windows Wireless Utility

Click ***** (Network icon) on the system tray, select your Wi-Fi network, and click **Connect**.

Note: In Windows XP, you need to close the TP-LINK Utility before using the Windows Wireless Utility.